


High Resolution Pin Hole Camera with OSD



Main Features

- ⇒ 1/3" Sony CCD
- ⇒ 600 TVL High Resolution Camera
- ⇒ 0.05 lux @ F1.2
- ⇒ 3.7 mm Pin Hole Lens
- ⇒ AGC, AES, BLC, Mirror, Privacy Masking and Motion Detection
- ⇒ 2D-DNR
- ⇒ CE, FCC and RoHS Certified

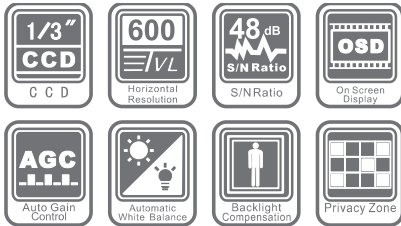

Feature	Specification
Image Sensor	1/3" Sony CCD
Pixels	PAL:752Hx582V, NTSC:768Hx494V
Resolution	600 TVL
Min. Illumination	0.05 lux @F1.2
S/N Ratio	more than 48dB
Electronic Shutter	1/50(1/60) - 1/100000 Sec
Flickerless Mode	ON/OFF
Lens	3.7 mm
Gamma Correction	0.45
White Balance (AWB)	Auto
Gain Control (AGC)	Auto
Back Light Compensation	ON/OFF Selectable
Sync	Internal
Video Output	1.0 Vp-p/75 ohm
Special Functions	OSD, Camera ID, Camera Title, Mirror, Privacy Masking=7, Motion Detection=4, 2D-DNR
Power Supply	DC 12V ± 5%
Power Consumption	<4W
Dimensions	36 x 36 x 15mm
Weight	130g
Operating Temperature	-10~50 °C
Certifications	CE, FCC, RoHs