

DH-DVR0404/0804/1604HF-SR

4/8/16 Channel Full Channel D1 RAID 2U Standalone DVR



Features

- > Up to 4/8/16 cameras with 1080P realtime preview
- > H.264 dual-stream video compression
- > Full channel@D1(4CIF) realtime recording
- > 2 HDMI / 1 VGA / 1 TV / 1 Spot simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 8 SATA HDDs up to 32TB (Hotswappable & RAID1/RAID5/RAID10 available), 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-DVR0404/0804/1604HF-SR

Specifications


Model		DH-DVR0404HF-SR	DH-DVR0804HF-SR	DH-DVR1604HF-SR
System				
Main Processor		Dual-core embedded processor		
Operating System		Embedded LINUX		
Video				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard		NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Loop Output		4 channel	8 channel	16 channel
Audio				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Output		1 channel, BNC		
Two-way Talk		1 channel Input, 1 channel Output, BNC		
Display				
Interface		2 HDMI, 1 VGA, 1 TV, 1 Spot, BNC		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split		1/4	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264 / G.711		
Resolution		D1/4CIF(704×576/704×480) / HD1(352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream	D1/HD1/2CIF/CIF(1~25/30fps)		
	Extra Stream	CIF/QCIF(1~25/30fps)		
Bit Rate		48~4096Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm				
Trigger Events		Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input		4 channel	8 channel	16 channel
Relay Output		6 channel		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		

DH-DVR0404/0804/1604HF-SR

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / eSATA Device / Internal SATA burner/ Network		
Network			
Ethernet	2 RJ-45 port (10/100M/1000M)		
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	8 SATA ports (8HDDs or 6HDDs+1CD/DVD-RW), up to 32TB		
External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB		
RAID	RAID1/RAID5/RAID10		
Auxiliary Interface			
USB Interface	4 ports (2 Rear), USB2.0		
RS232	1 port, For PC communication & Keyboard		
RS485	1 port, For PTZ control		
General			
Power Supply	AC100~240V, 50/60Hz		
Power Consumption	25W	30W	40W
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa		
Dimension(W×D×H)	2U, 440mm×460mm×89mm		
Weight	10KG(without HDD)		

DH-DVR0404/0804/1604HF-SR

Dimensions

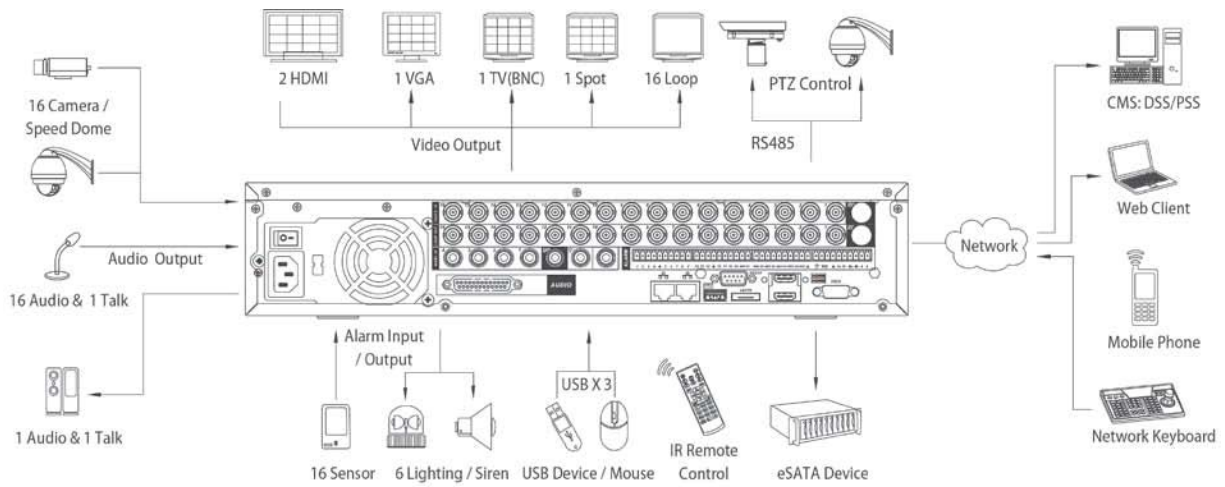

<http://www.asi.ind.in>

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.