



## DS-2CZ2132P Zoom Camera

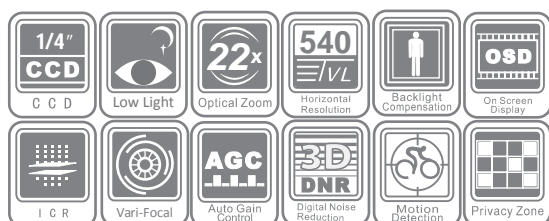

### Key Features

- 1/4" Sony Interline Transfer Super HAD-II CCD
- 22x optical zoom
- 540 TVL high resolution
- Low illumination
- OSD menu
- Day / night auto switch
- 3D digital noise reduction
- Electronic image stabilization

### Dimensions

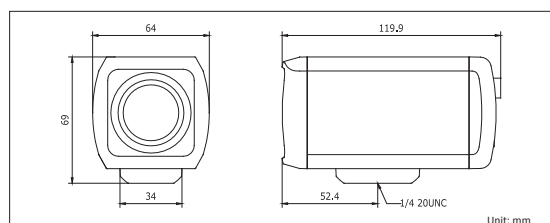

### Accessories



### Specifications

DS-2CZ2132P	
<b>Camera</b>	
Image sensor	1/4" Sony Interline Transfer Super HAD-II CCD
Signal system	PAL
Effective pixels	PAL: 752(H) × 582(V)
Min. illumination	Color: 0.2 lux@F1.6, AGC on, 0.0002 lux@F1.6, AGC on, sens-up × 512
Shutter time	1/50 (1/60)s ~ 1/100, 000s
Day & night	Electronic
Horizontal resolution	540 TVL
Synchronize mode	Internal
Video output	1 Vp-p Composite Output (75 Ω / BNC)
S/N ratio	>50 dB
<b>Lens</b>	
Focal length	3.9 ~ 85.8mm, 22x
Zoom speed	Approx. 3s (optical, wide-tele)
Horizontal viewing angle	49.6 ~ 2.40° (wide-tele)
Min. working distance	10 ~ 1500mm (wide-tele)
Aperture range	F1.6 ~ F3.7
<b>Menu</b>	
Camera ID	Off / on (0 ~ 254)
Iris mode	Auto / manual / electronic
Shutter	1/50 (1/60)s ~ 1/100, 000s
Auto gain control	Off / low / high
White balance	ATW 1 / ATW 2 / auto / manual
Focus	Auto / once / manual
Day & night	Auto / B/W / external trigger
Slow shutter	×512 max.
Privacy mask	Off / on, Up to 8 zones
Motion detection	Off / mode 1 / mode 2
Gamma correction	0.45 / 1
Video settings	3D-DNR, mirror, definition, flickerless, exposure-compensation, BLC, image freezing, electronic image stabilization
Zoom speed	Level 1 ~ 5 adjustable
Digital zoom	Off, ×2, ×4, ×6, ×8, ×10, ×12, ×14, ×16
Zoom ratio display	On / off
ZCF control mode	Mode 1 / mode 2
RS-485	Communication protocol / baud rate / address
Preset	254
Dead pixel detection	Yes
<b>General</b>	
Working temperature & humidity	-10°C ~ 60°C, Humidity: ≤ 90% (no condensation)
Power supply	12 VDC ± 10%
Power consumption	4W max.
Dimensions	64 × 69 × 120 mm
Weight	450g

### Available models

DS-2CZ2132P