


DS-6301/6304/6308DI Decoder Server



Key Features

- H.264/MPEG4 video compression
- Up to 720P resolution decoding
- Voice talk function
- SADP(IP finder), DHCP, NTP and RTP network protocols

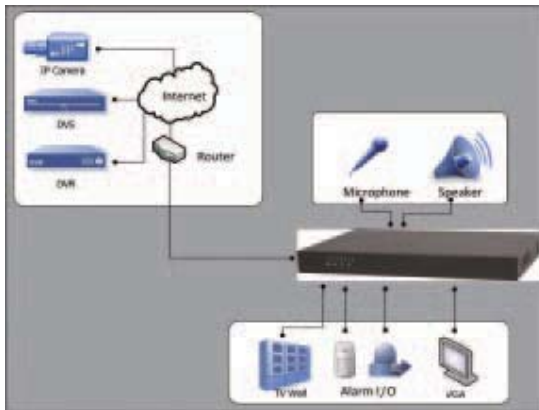

Specifications

	DS-6301DI	DS-6304DI	DS-6308DI
Video/Audio input			
Voice talk input	1-ch, BNC (2.0 Vp-p, 1 kΩ)		
Video/Audio output			
VGA output	1-ch	2-ch	4-ch
	Resolution:1280×1024 /60 Hz, 1280×720 /60 Hz,1024×768 /60 Hz		
Video output	1-ch BNC (1.0 Vp-p, 75 Ω)	4-ch BNC (1.0 Vp-p, 75 Ω)	8-ch BNC (1.0 Vp-p, 75 Ω)
Decoding resolution	720P / 4CIF / DCIF / 2CIF / CIF / QCIF		
Frame rate	720P: 25 fps (P) / 30 fps (N)		
Audio output	1-ch, BNC (Linear, 600 Ω)	4-ch, BNC (Linear, 600 Ω)	8-ch, BNC (Linear, 600 Ω)
Stream type	Video, Video & Audio		
External interface			
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface		
Serial interface	1 RS-232 interface (for parameters configuration, maintenance , transparent channel); 1 RS-485 interface (for PTZ control)		
Alarm in	8		
Alarm out	8		
General			
Power supply	12 VDC		
Consumption	≤ 40 W		
Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)		
Working humidity	10% ~ 90%		
Dimensions (W × D × H)	440 x 44.5 x 320 mm		
Weight(without HDD)	≤ 5 kg		

Rear Panel of DS-6308DI



- | | |
|-----------------------|------------------|
| 1. Video/audio out | 7. LAN |
| 2. Line in | 8. RS-485 |
| 3. Line out | 9. Alarm in |
| 4. Audio-1 to audio-4 | 10. Alarm out |
| 5. Vga | 11. Power switch |
| 6. RS232 | 12. GND |