

DS-2CD893P(N)FWD-E(W) WDR Network Camera




Key features

- Real time video at 4CIF
- H.264 / MPEG4 / MJPEG video compression
- 1/3" Sony vertical double density interline CCD
- 160x wide dynamic range
- True day / night
- PoE

Dimensions

Unit: mm

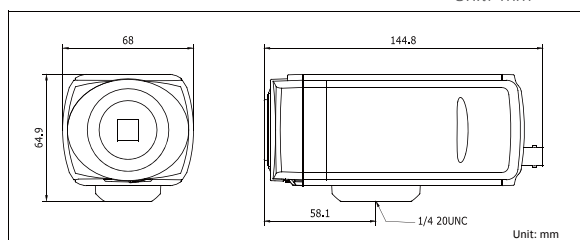

Accessories



Specifications

DS-2CD893PFWD-E(W) / DS-2CD893NFWD-E(W)	
Camera	
Image sensor	1/3" Sony vertical double density interline CCD
Signal system	PAL / NTSC
Min. illumination	Color: 0.1 lux@F1.2, AGC on B/W: 0.01 lux@F1.2, AGC on
Shutter time	1/25 (1/30)s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Wide dynamic range	160x
Compression standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 8 Mbps
Audio compression	G.711
Dual stream	Yes
Image	
Max. image resolution	PAL: 704 × 576 NTSC: 704 × 480
Frame rate	50 HZ: 25 fps (704 × 576) 60 HZ: 30 fps (704 × 480)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, SIP, FTP, SRTP, 802.1x, IPv6 optional)
Security	Password protection, watermark
System compatibility	ONVIF, PSIA, CGI
Interface	
Audio input	1-ch microphone input, 3.5 mm mini-jack
Audio output	1-ch 3.5 mm audio interface (line level, 600 Ω)
Communication interface	1 RJ45 10M / 100M ethernet port and 1 RS-485 interface
Alarm input	1
Alarm output	1
Video output	1 Vp-p composite output (75 Ω / BNC)
Local storage	Built-in SD/SDHC slot, up to 32 GB
Reset button	Yes
General	
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	5.5W max. (8.5W max. with IR cut filter on) -W: 7W max. (10W max. with IR cut filter on)
Dimensions	68 × 64.9 × 144.8 mm (2.67" × 2.56" × 5.70")
Weight	500g (1.10 lbs)

Available models

DS-2CD893PFWD-E, DS-2CD893NFWD-E, DS-2CD893PFWD-EW, DS-2CD893NFWD-EW